




UIAA

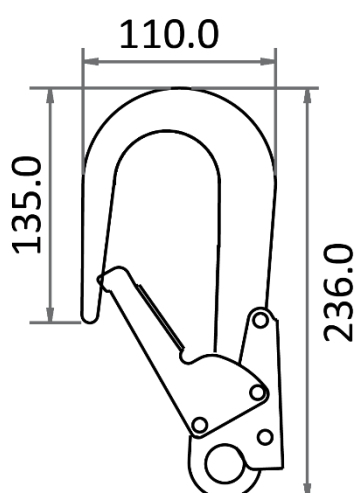

REF.	FA 50 208 60
CE	EN 362:2004 Class A/T EN 12275 Class K/T
	22 kN / 60 mm
MAT.	 ALU
	DOUBLE ACTION
KEYLOCK	---
+	UIAA
	0.44 KG

	MAT.	
Résistance à la rupture / Ouverture Breaking strength / Gate opening	Matière Material	Type d'ouverture Opening system
Resistencia a la ruptura / Apertura Resistenza alla rottura / Apertura	Material Materia	Tipo de apertura Sistema di apertura
Bruchfestigkeit / Öffnung	Material	Öffnungssystem

HS CODE
76169990
CARTON SIZE / PCS.
39x28x18/25
AET (EU) N°2777/10366-02/E03-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16041-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom