


REF.	FA 50 222 55
CE	EN 362:2004 Class T
	23 kN / 57 mm
MAT.	P/STEEL
	DOUBLE ACTION
KEYLOCK	---
+	MAX. DIELECTRIC RESISTANCE = 14KV
	0.56 KG



MAT.

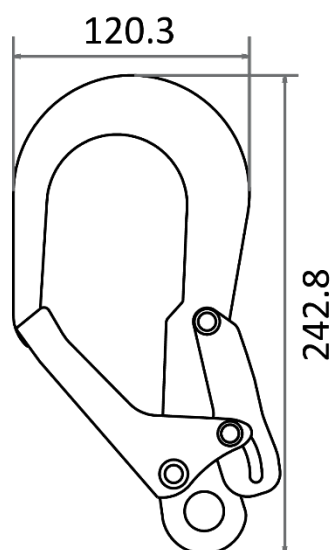

Résistance à la rupture / Ouverture
Breaking strength / Gate opening
Resistencia a la ruptura / Apertura
Resistenza alla rottura / Apertura
Bruchfestigkeit / Öffnung

Matière
Material
Material
Materia
Material

Type d'ouverture
Opening system
Tipo de apertura
Sistema di apertura
Öffnungssystem

HS CODE
73269098
CARTON SIZE / PCS.
40x30x19/25
AET (EU) N°2777/10356-02/E02-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16044-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom